




TM 127-1.4-4.0 Thermoelectric Cooling Module

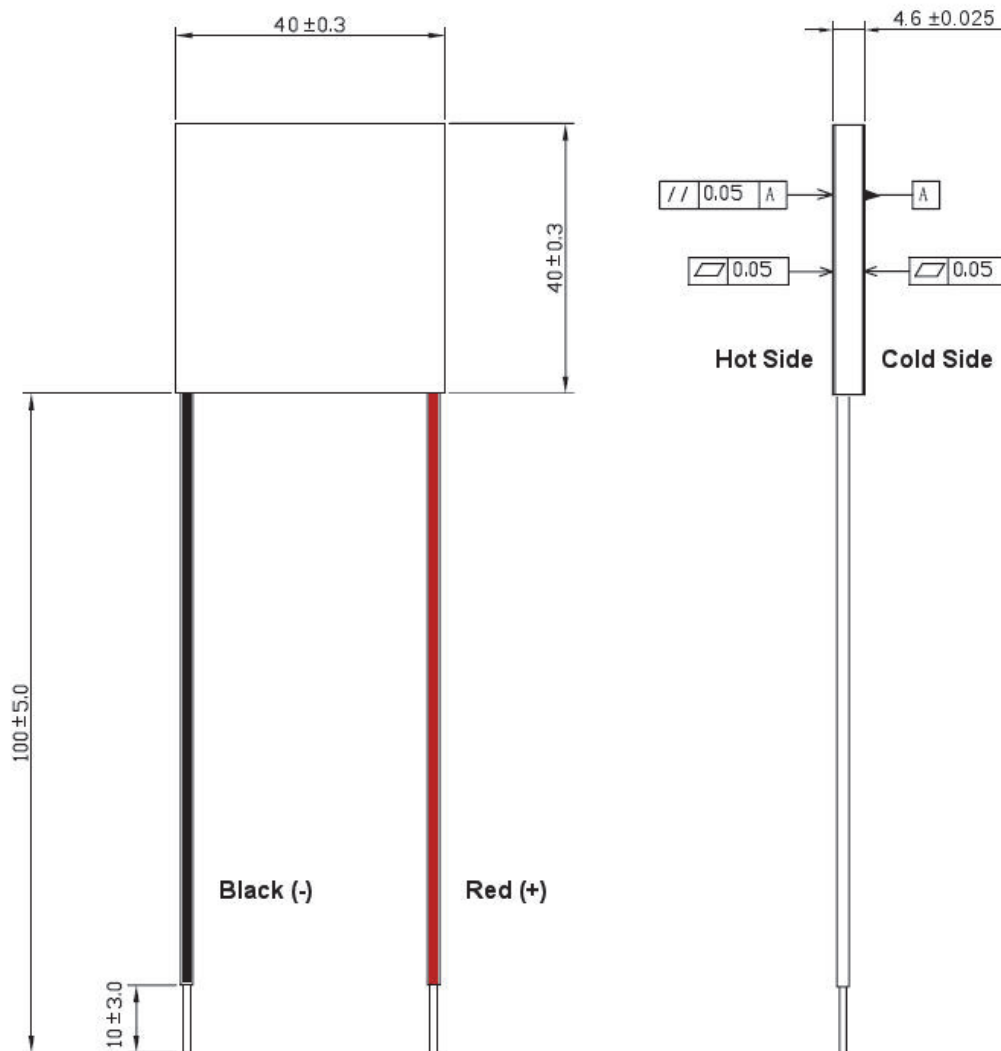

$I_{\max} = 3.9$ Amps ($I_{\max}$ is the maximum current at $\Delta T_{\max}$)

$V_{\max} = 15.7$ Volts ($V_{\max}$ is maximum voltage at $\Delta T_{\max}$)

$Q_{c\max} = 35.2$ Watts ($Q_{c\max}$ is maximum cooling capacity at $I_{\max}$, $V_{\max}$ and $\Delta T = 0$ °C)

$\Delta T_{\max} = 70$ °C ($\Delta T_{\max}$ is maximum temperature difference at $I_{\max}$, $V_{\max}$ and $Q_c = 0$ W)

TM 127-1.4-4.0 Web Page Link

ADVANCED THERMOELECTRIC

Toll-Free 1 (866) 665-5434

(603) 888-2467

sales@electracool.com

Copyright © 2017 Pollock Industries, Inc.